

## Flexible SMD-LED

Portable | Bi-color | Rain proof



**S-2630 | 150W**

756 LEDs, 3900Lux@1m



**S-2610 | 100W**

504 LEDs, 2400Lux@1m




**S-2620 | 50W**

280 LEDs, 1200Lux@1m



### Flexible SMD-LED with Rain Proof

The SMD LEDs are mounted to a rain proof fabric that can be curved to any shapes to output 10°-360° various lighting angles, and makes the light part extremely portable. You can scroll the light fabric into your backpack, or hang the light fabric to a C-stand as a head light, or place the light fabric anywhere especially the narrow spaces.

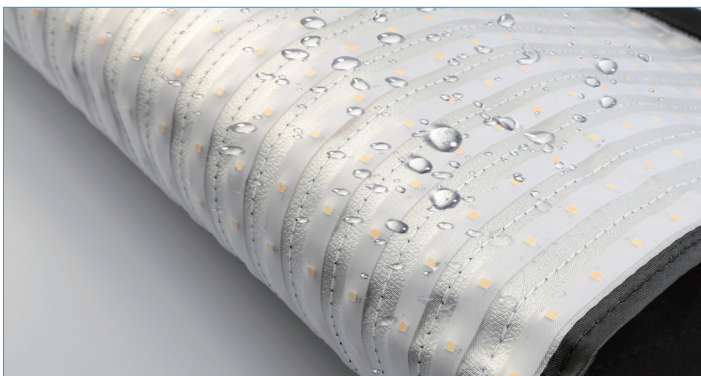


### 3000-5600K Continuously Adjust

The flexible LEDs alternated with 5600K and 3000K LEDs, and the output color temperature can be continuously adjustable between 3000K and 5600K.




### CRI 97; TLCI 97

Both CRI and TLCI reach 97, to reproduce a nature color under lighting.



Television Lighting Consistency Index-2012

| Sector | Lightness | Chroma | Hue |
|--------|-----------|--------|-----|
| R      | 0         | 0      | 0   |
| R/Y    | 0         | 0      | 0   |
| Y      | 0         | 0      | 0   |
| Y/G    | 0         | 0      | 0   |
| G      | 0         | 0      | 0   |
| G/C    | 0         | 0      | 0   |
| C      | 0         | 0      | +   |
| C/B    | 0         | 0      | 0   |
| B      | 0         | 0      | 0   |
| B/M    | 0         | 0      | ++  |
| M      | 0         | 0      | +   |
| M/R    | 0         | 0      | 0   |

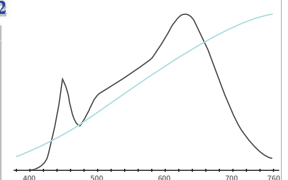



## Separate Control Box


The control box offers V-mount plate, 4-pin XLR 11-17V DC in, and a touch screen to adjust dimmer percentage and color temperature value.



## 2.4G Wireless Interaction control

The lights support 2.4G wireless network connected to each other.

Select A, B, C, D wireless channels on the control box, and operate any one flexible light, the other lights in the same channel can be wirelessly controlled together.

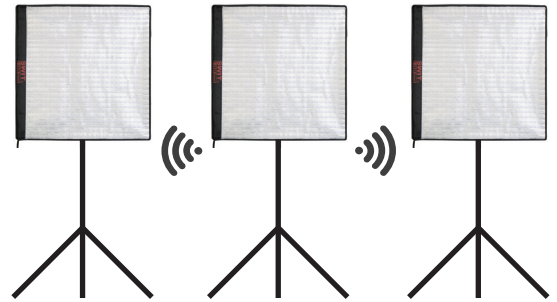

## Accessories



X-bracket



Diffusing cover



Ball Diffuser  
Optional purchase



Egg Crate Diffuser  
Optional purchase



## Specifications

| Model                   | S-2610  | S-2620  | S-2630  |
|-------------------------|---|---|---|
| LED                     | 504pcs SMD LEDs   | 280pcs SMD LEDs   | 756pcs SMD LEDs   |
| Luminance               | 2400Lux @ 1m  | 1200Lux @ 1m  | 3900Lux @ 1m  |
| Beam Angle              | 10°-360°  | 10°-360°  | 10°-360°  |
| Color Temperature       | 3000K-5600K   | 3000K-5600K   | 3000K-5600K   |
| CRI                     | Ra≥97   | Ra≥97   | Ra≥97   |
| TLCI                    | TLCI≥97   | TLCI≥97   | TLCI≥97   |
| Power                   | 100W  | 50W   | 150W  |
| Input Voltage           | DC 11-17V   | DC 11-17V   | DC11-17V  |
| Dimensions - light      | 600mm×460mm   | 455mm×315mm   | 600mm×600mm   |
| Dimensions - controller | 203mm×123mm×71mm  | 258mm×80mm×66mm   | 273mm×126mm×68mm  |
| Weight                  | Light: 0.46Kg;<br>Controller: 0.84Kg;<br>AC adaptor: 0.43Kg | Light: 0.29Kg;<br>Controller: 0.81Kg;<br>AC adaptor: 0.29Kg | Light: 0.7Kg;<br>Controller: 1.1Kg;<br>AC adaptor: 0.84Kg |