

SWIT®

Bowens Mount COB-LED Lights

BL-series



BL-150E

150W AC Power Only, Built-in Controller



BL-200

200W AC & Battery Power, Separate Controller



BL-300

300W AC & Battery Power, Separate Controller



Ultra Bright COB LEDs


5600K Daylight

		1 meter	3 meters	5 meters
BL-150E	Light only	4400Lux	570 Lux	240Lux
	With Reflector	27290Lux	3550Lux	1470Lux
BL-200	Light only	5900Lux	770Lux	320Lux
	With Reflector	38000Lux	4940Lux	2050Lux
BL-300	Light only	12100Lux	1570Lux	650Lux
	With Reflector	54000Lux	7020Lux	2910Lux




CRI 97; TLCI 98

Accurate Color



Sector	Lightness	Chroma	Hue
R	0	0	0
R/Y	0	0	0
Y	0	0	0
Y/G	0	0	0
G	0	0	0
G/C	0	0	+
C	0	0	0
C/B	0	0	0
B	0	-	0
B/M	0	0	+
M	0	0	+
M/R	0	0	+

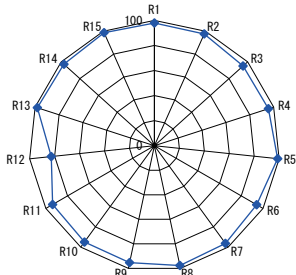

Control Panel

5-pin DMX in & out



5-pin DMX IN PowerCON AC IN 5-pin DMX OUT

BL-150E



BL-200 / 300 Controller

Control buttons

Power Out to light head

PowerCON AC-IN


5-pin DMX OUT

5-pin DMX IN




APP Remote


IOS & Android

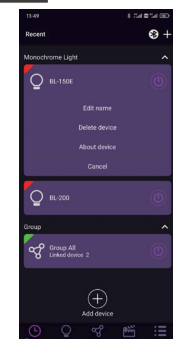


Add and Group lights



Intensity adjust

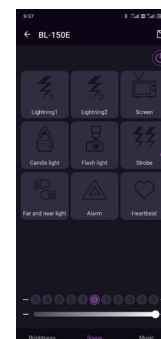

Select light effects



Sync to music



9x Light Effects

With Intensity and Speed Adjustment



Lightning Lightning Screen Candle Flash Strobe Car light Alarm Breath



Bowens Mount Accessories

Optional Purchase




BA-OCT36

36-inch Easy-open Octagonal Softbox
With dual diffusers



BA-LAN26

26-inch Easy-open Lantern Softbox

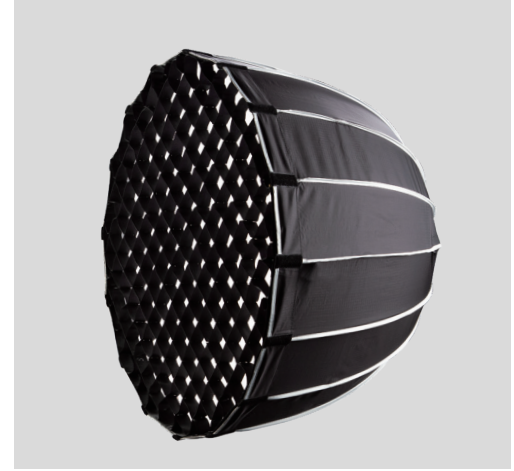

BA-PARA26

26-inch Easy-open Parabolic Dome Softbox
With eggcrate and dual diffusers



BA-BD16

16-inch Beauty Dish
with 40° Honeycomb and diffuser



BA-ST3

3.1-inch Snoot with honeycomb
with 25° & 30° Honeycombs and 5x color filters



BA-F3X

Fresnel 12-40° 3x Lens
with 10x color filters



Specifications

Model	BL-150E	BL-200	BL-300
LED	150W COB-LED	200W COB-LED	300W COB-LED
Luminance	27290Lux @ 1m with reflector	38000Lux @ 1m with reflector	54000Lux @ 1m with reflector
Color temp	5600K	5600K	5600K
Color rendering	CRI 97; TLCI 98	CRI 97; TLCI 98	CRI 97; TLCI 98
DMX	DMX512 5pin XLR in & out	DMX512 5pin XLR in & out	DMX512 5pin XLR in & out
Input voltage	AC 100-240V (PowerCON)	AC 100-240V (PowerCON), battery 11-17V	AC 100-240V (PowerCON), battery 11-17V
Dimension	272×199×333mm	Light: 272×199×333mm Controller: 170×125×218mm	Light: 301×199×333mm Controller: 170×125×218mm
Weight	2.15kg	Light 1.8kg; Controller 1.9kg	Light 2.5kg; Controller 1.9kg

SWIT Electronics Co., Ltd.
+86-25-85805753
<http://www.swit.cc>
Email: contact@swit.cc

SWIT Electronics America, Inc
1-(408)260-8258
<http://www.switusa.com>
Email: info@swit.us

SWIT Electronics Europe GmbH
+49(0)2131 6632331
<http://www.switeu.com>
Email: info@swit-europe.com



Facebook Page



Instagram